



## „Cyclists running the red light – Influence of bicycle type under different conditions“



Katja Schleinitz, Tibor Petzoldt, Sebastian Mach  
Technische Universität Chemnitz

Sophie Kröling, Tina Gehlert  
German Insurers Accident Research

- Red light running (RLR) is one of the most common traffic violations among cyclists
  - Surveys: 38% - 45% (Alrutz et al., 2009; Bacchieri et al., 2010)
  - Observational data: 7%-60% (Johnson et al. 2011; van der Meel, 2013; Fraboni et al., 2016)
- RLR has the potential to contribute to conflicts and crashes at intersections:  
Berlin, nearly 6% of all crashes caused by cyclists could be ascribed to red light violations (Stab des Polizeipräsidenten, 2016)

## Influencing Factors for RLR

- Age or gender (e.g. Johnson et al. 2013; Wu et al., 2012; Johnson et al., 2011; Ceunynck et al., 2016)
- Type of the bicycle: Field observations in China showed that e-bike riders violated a red light more often than conventional cyclists (Wu et al., 2012; Yang et al., 2012, 2016; Zhang & Wu, 2013)
  - motor assistance might tempt to run red light
  - definition of e-bikes in China differs from Western
  - data from pedelec and S-pedelec riders is largely missing

## Influencing factors

- Infrastructure type and use: available studies were conducted as stationary observations at selected intersections → they cover only one specific infrastructural scenario
- hardly any knowledge on the role of, e.g., the intersection type for red light running and the infrastructure which is used by the cyclists
- Only an American investigation concerned with infrastructure type:  
twice as many red light violations when the cyclists used bicycle infrastructure compared to when they used the carriageway (Cole et al., 2011)




The goal of the study was to characterise the red light running behaviour of cyclists in Germany, with specific focus on the potential effect of the bicycle type (bicycle, pedelec, S-pedelec) on red light running frequency, as well as the infrastructural circumstances of the violations.

= **passive observation of cyclists „normal“ riding behaviour.**

## Data acquisition

- Video coding  red light running

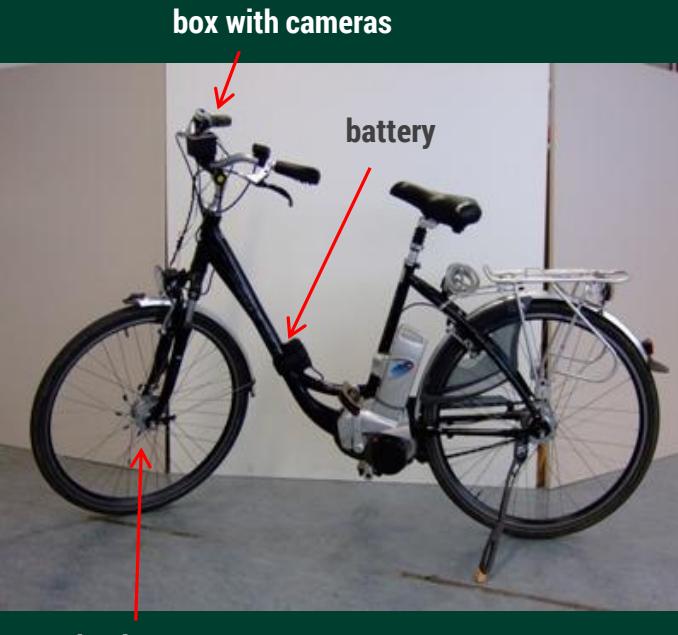

# Participants

**88** participants

**31** conventional cyclists      51.5 years old (SD = 17.2)


**47** pedelec riders                54.4 years (SD = 16.7)

**10** S-pedelec rider              41.7 years (SD = 17.5)

**Gender**



32



56

Observation of 4 weeks of cycling per participant



more than 4,300 trips

nearly 17,000 kilometres of cycling

## Coding of red light situations

1. Identification of situations when cyclists encountered a traffic light
2. Coding of all encounters with a traffic light → red light situations were all situations coded in which
  - the traffic light shows red (90% of the coded situations)
  - situations in which the traffic light changes from yellow to red or shows yellow for more than 3 seconds
3. Detailed coding of red light running situations:
  - direction of cycling e.g. turning right
  - type of infrastructure used shortly before the traffic light was reached and when the cyclist was about to pass the traffic light e.g. bicycle infrastructure
  - intersection type e.g. T-intersection



- Identification of circumventions (infrastructure changes to avoid a red light)
- Calculation of a red light running rate for further analysis (excl. circumventions)  
= number of genuine red light violations / total number of red light encounters

# Bicycle type and red light running

7,969 red light situations



6,230 participants complied with the road rules

1,335 participants ran the red light

404 circumventions




Red light running rate = 17%

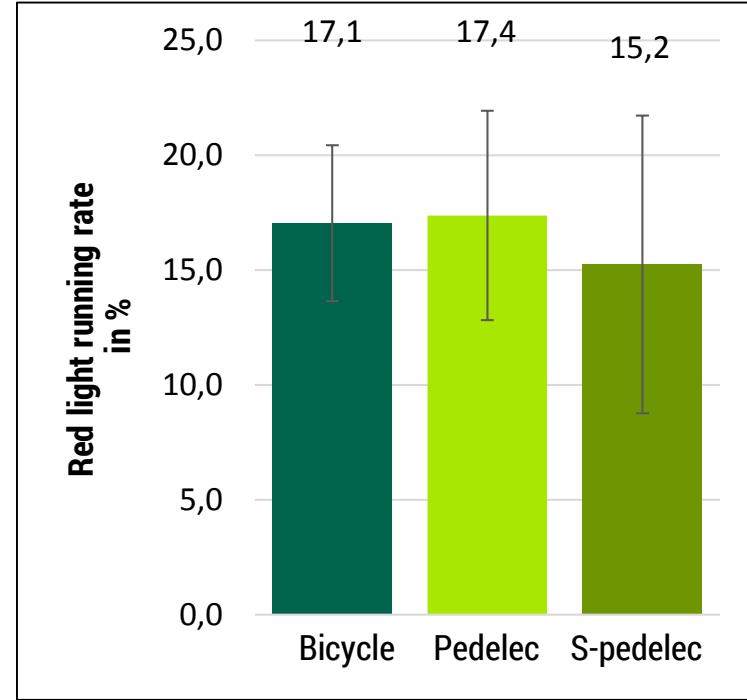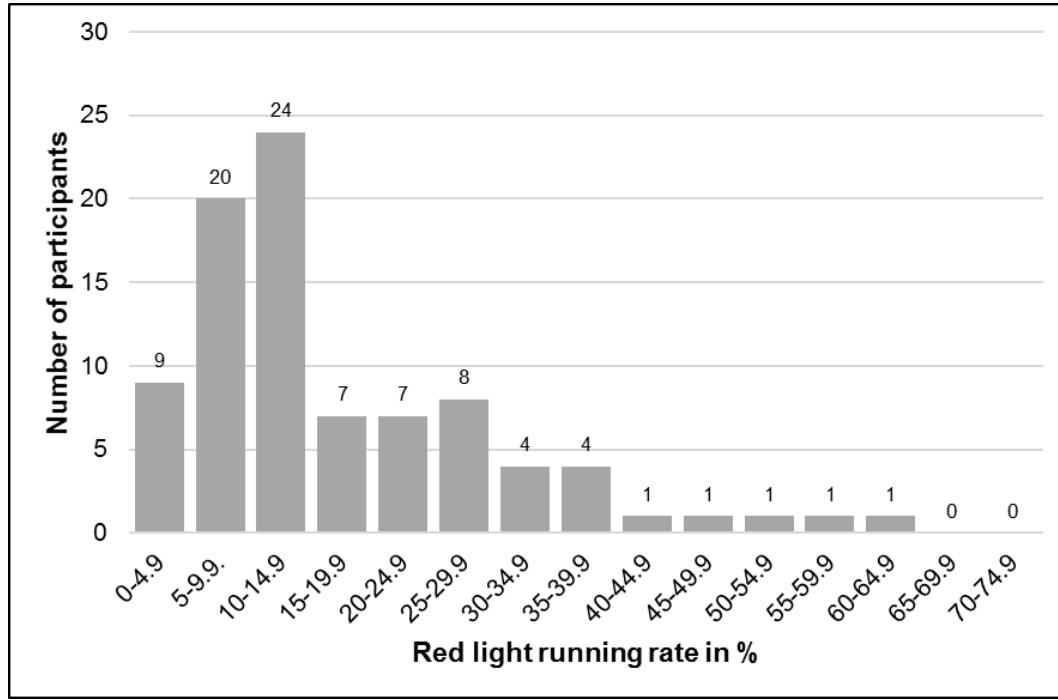

No significant differences between bicycle types ( $H(2) = 0.77, p = .679$ ).

# Circumstances of red light running

|                  | Red light situations* | Bicycle type |         |         | Total |
|------------------|-----------------------|--------------|---------|---------|-------|
|                  |                       | N            | Bicycle | Pedelec |       |
| Passing straight | 6,471                 | 14.6         | 16.1    | 15.1    | 15.3  |
| Turning right    | 449                   | 66.8         | 51.2    | 40.3    | 56.3  |
| Turning left     | 645                   | 16.1         | 11.5    | 13.7    | 14.4  |

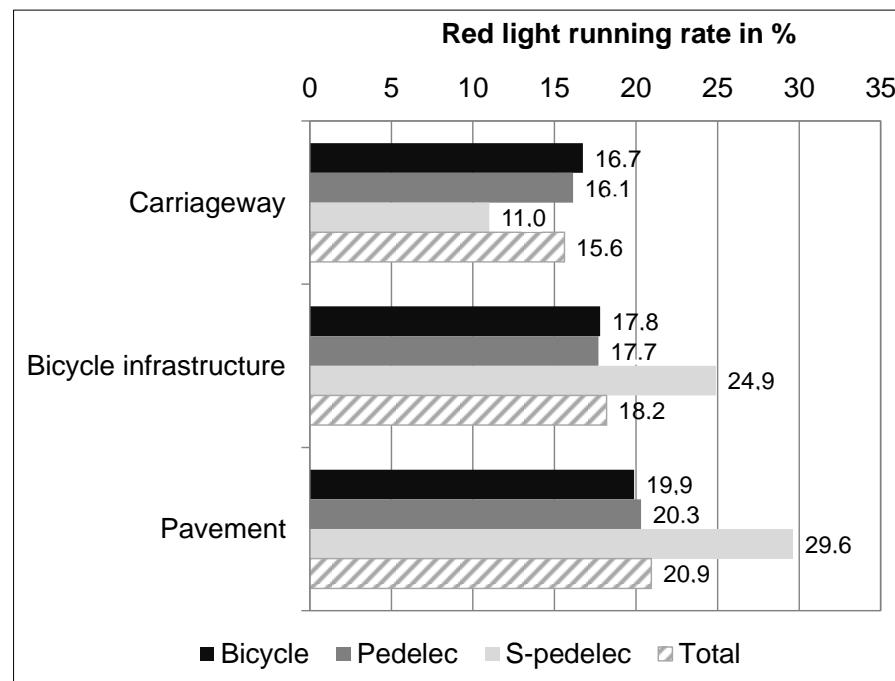

# Circumstances of red light running

|   | Red light situations* | Bicycle type |         |         |           | Total |
|---|-----------------------|--------------|---------|---------|-----------|-------|
|   |                       | N            | Bicycle | Pedelec | S-Pedelec |       |
| Five arms or more   |                       | 7            | 16.7    | 0.0     | 0.0       | 14.3  |
| Four arms   |                       | 2,191        | 13.0    | 15.1    | 12.9      | 13.8  |
| T-intersection<br>(approaching on the road that ended)              |                       | 337          | 50.0    | 36.4    | 23.8      | 37.7  |
| T-intersection<br>(approaching on the through road)                 |                       | 448          | 16.3    | 13.9    | 13.4      | 14.7  |
| Railway crossing  |                       | 38           | 24.1    | 40.0    | 0.0       | 23.7  |
| Roads without junctions   |                       | 209          | 36.9    | 19.3    | 4.3       | 26.3  |
| Bicycle infrastructure crosses a carriageway or each other          |                       | 3,128        | 16.6    | 16.5    | 24.7      | 17.0  |
| Pavement crosses a carriageway or each other (pedestrian crossings) |                       | 1,207        | 20.3    | 19.9    | 20.4      | 20.1  |

# Circumstances of red light running

|   | Bicycle type |         |           |       |
|---|--------------|---------|-----------|-------|
|   | Bicycle      | Pedelec | S-Pedelec | Total |
| Number of circumventions                                    | 215          | 167     | 22        | 404   |
| Total number of red light situations (incl. circumventions) | 3,762        | 3,414   | 793       | 7,969 |
| Circumvention rate %  | 5.7          | 4.9     | 2.8       | 5.1   |

In the majority of circumventions participants, independent of bicycle type, changed from the carriageway to the pavement (79.5 %)



In total, some form of violation, either by running the red light or by circumventing it, occurred in more than 20% of all red light encounters.

## Red light running

- Red light running rates of cyclists, pedelec and S-pedelec riders are moderate compared to observations from other countries (Cole et al., 2011; van der Meel, 2013; Fraboni et al., 2016)
- In addition to cases of genuine red light running, we were able to observe a substantial number of infrastructure changes to avoid stopping at the red light and continue the ride unimpeded.
- Total violation rate of about 20% (including circumventions) appears to be much lower than what has been observed, e.g., in Italy, but is nevertheless too high to be dismissed as isolated incidents

## Bicycle type

- No significant difference in the red light running rates between pedelec riders, S-pedelec riders and conventional cyclists → clear difference to Chinese findings (Wu et al.; 2012)

## Infrastructure

- When turning right, red light running was more frequent (see Jahangiri, Elhenawy, Rakha and Dingus, 2016; Johnson et al., 2013)
- Red light running rates were highest at T-intersections, when approaching on the road that ended
- Violation rates were high for roads without junctions → good visibility, low traffic animated the participants to run a red light
- Small differences between bicycle types with regard to infrastructure use while red light running

## In practice,

- No differences between bicycle types but infrastructure has a possible influence on red light violations and might be regulated through design and construction measures

## Recommendation:

- Interpretation of some results are difficult, a bigger sample size for specific factor combinations is needed
- Propensity to commit a violation in a certain scenario largely depends on context factors or others factors such as trip purpose or route choice.  
→ These factors should be investigated further

# Thank you!



# References

Adams, J., & Hillman, M. (2001). The risk compensation theory and bicycle helmets. *Injury Prevention*, 7, 343. doi:10.1136/ip.7.4.343

Finnoff, J. T., Laskowski, E. R., Altman, K. L., & Diehl, N. N. (2001). Barriers to bicycle helmet use. *Pediatrics*, 108(1), 1–7. doi:10.1542/peds.108.1.e4

Fischer, C. M., Sanchez, C. E., Pittman, M., Milzman, D., Volz, K. a., Huang, H., ... Sanchez, L. D. (2012). Prevalence of bicycle helmet use by users of public bikeshare programs. *Annals of Emergency Medicine*, 60(2), 228–231. doi:10.1016/j.annemergmed.2012.03.018,

Fyhri, A., Bjørnskau, T., & Backer-Grøndahl, A. (2012). Bicycle helmets—A case of risk compensation?. *Transportation research part F: traffic psychology and behaviour*, 15(5), 612-624.

Fyhri, A., & Phillips, R. O. (2013). Emotional reactions to cycle helmet use. *Accident Analysis and Prevention*, 50, 59–63. doi:10.1016/j.aap.2012.03.027

Hagel, B. E., & Barry Pless, I. (2006). A critical examination of arguments against bicycle helmet use and legislation. *Accident Analysis and Prevention*, 38, 277–278. doi:10.1016/j.aap.2005.09.004

Kakefuda, I., Stallones, L., & Gibbs, J. (2009). Discrepancy in bicycle helmet use among college students between two bicycle use purposes: commuting and recreation. *Accident Analysis and Prevention*, 41(3), 513-521.

Lardelli-Claret, P., de Dios Luna-del-Castillo, J., Jiménez-Moleón, J. J., García-Martín, M., Bueno-Cavanillas, A., & Gálvez-Vargas, R. (2003). Risk compensation theory and voluntary helmet use by cyclists in Spain. *Injury Prevention*, 9, 128–132. doi:10.1136/ip.9.2.128

Oxley, J., Corben, B., Fildes, B., O'Hare, M., & Rothengatter, T. (2004). *Older vulnerable road users - Measures to reduce crash and injury risk*. Monash, Groningen.

Petzoldt, T.\*., Schleinitz, K.\*., Heilmann, S., & Gehlert, T. (in press). Traffic conflicts and their contextual factors when riding conventional vs. electric bicycles. *Transportation Research Part F: Traffic Psychology and Behaviour*. doi:10.1016/j.trf.2016.06.010

Rodgers, G. B. (1995). Bicycle helmet use patterns in the United States. A description and analysis of national survey data. *Accident Analysis and Prevention*, 27(1), 43–56.

Schleinitz, K., Petzoldt, T., Franke-Bartholdt, L., Krems, J., & Gehlert, T. (in press). The German Naturalistic Cycling Study - Comparing cycling speed of riders of different e-bikes and conventional bicycles. *Safety Science*. doi:10.1016/j.ssci.2015.07.027,

Teschke, K., Brubacher, J. R., Friedman, S. M., Cripton, P. A., Harris, M. A., Reynolds, C. C., ... & Winters, M. (2012). Personal and trip characteristics associated with safety equipment use by injured adult bicyclists: a cross-sectional study. *BMC public health*, 12(1), 765.

Wandtner, B. (2014). *Sicherung durch Gurte, Helme und andere Schutzsysteme 2013*. Bergisch Gladbach.